


SYDRoS RO 5000

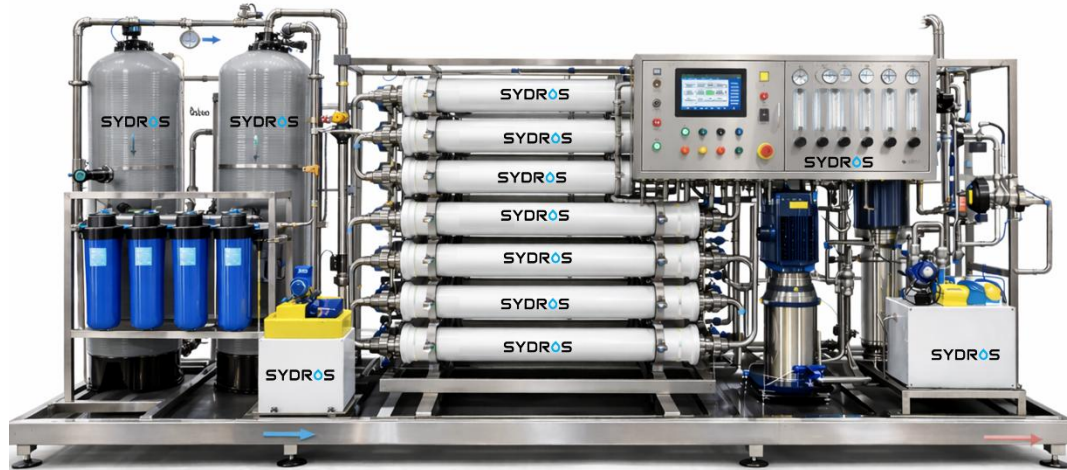

TECHNICAL DATA SHEET

Industrial Reverse Osmosis System – 5000 LPH (5.0 m³/h)

1. System Overview

Parameter	Specification
System Type	Brackish Water Reverse Osmosis (BWRO)
Nominal Capacity	5000 L/h (±15%)
Membrane Configuration	8 × 8040 (parallel) or 2-stage 5:3 array
Pressure Vessel Rating	600 psi FRP
Design	Heavy-duty reinforced stainless steel skid
Operation Mode	Continuous 24/7 industrial duty

2. Performance Data

Parameter	Value
Permeate Flow Rate	5000 L/h
Daily Production	Up to 120 m ³ /day

Recovery Rate	70–75%
Salt Rejection	98–99%
Feed TDS (max.)	4,500 ppm (BWRO class)
Permeate Conductivity	< 10–25 $\mu\text{S}/\text{cm}$
Design Conditions	25°C / 1,000 ppm TDS

3. Membrane Section

Parameter	Specification
Membrane Type	Thin Film Composite (TFC)
Membrane Size	8040
Quantity	8 membranes
Operating Pressure	18–26 bar
Max Operating Pressure	30 bar
Auto Flush	Standard
CIP System	Fully integrated, mandatory
Interstage Monitoring	Recommended

4. Pre-Treatment (Mandatory Process Setup)

Parameter	Specification
Multimedia Filter	Required
Activated Carbon	Required
Cartridge Filtration	5 μm + 1 μm polishing
Antiscalant Dosing	Required
Softener	Strongly recommended above 5 °dH
Required SDI	< 3 (target < 2)
Turbidity	< 1 NTU

5. Pump System

Parameter	Specification
Pump Type	High-pressure industrial multistage stainless steel
Motor Power	15 – 22 kW
Operating Pressure	18–26 bar
Frequency Drive	Recommended (energy optimization)
Protection	Low pressure / high pressure / overload / dry-run

6. Instrumentation & Control

Parameter	Specification
Control System	Industrial PLC + HMI
Conductivity Monitoring	Feed + permeate (standard)
Flowmeters	Permeate + concentrate
Pressure Monitoring	Feed / interstage / concentrate / ΔP
Alarm System	Conductivity, pressure, flow deviation
Data Logging	Standard
Remote Monitoring	SCADA-ready

7. Hydraulic Connections

Parameter	Specification
Feed Connection	2½"
Permeate Outlet	2"
Concentrate Outlet	2"

Piping Material	Stainless Steel (recommended)
Flow Regulation	Precision concentrate valve + auto flush

8. Electrical Data

Parameter	Specification
Voltage	400 V / 50 Hz (3-phase)
Power Consumption	18 – 30 kW (system total)
Control Cabinet	Industrial stainless steel IP54
Main Protection	Industrial breaker + motor protection

9. Mechanical Data

Parameter	Specification
Frame Material	Stainless Steel 304 (optional 316)
Dimensions (L × W × H)	approx. 3200 × 1200 × 2100 mm
Weight	approx. 1800 – 2500 kg
Installation	Heavy-duty floor-mounted skid

10. Feed Water Requirements

Parameter	Recommended Limit
Temperature	5 – 35 °C
Iron (Fe)	< 0.1 mg/L
Manganese (Mn)	< 0.05 mg/L
Hardness	< 5 °dH without softener
SDI	< 3 (target < 2)



Sydros Water GmbH
Kirlacherstr.6
76646 Bruchsal

Engineering at
Triwo Technologie Park Bruchsal
Werner/von Siemens/
Web: www.sydros.de
Mail: industrial@sydros.de
Number: +491590 6132 674
HRB: 745634

